


Sunsail 41 - 3 Cabin, 2 Head *Specifications*

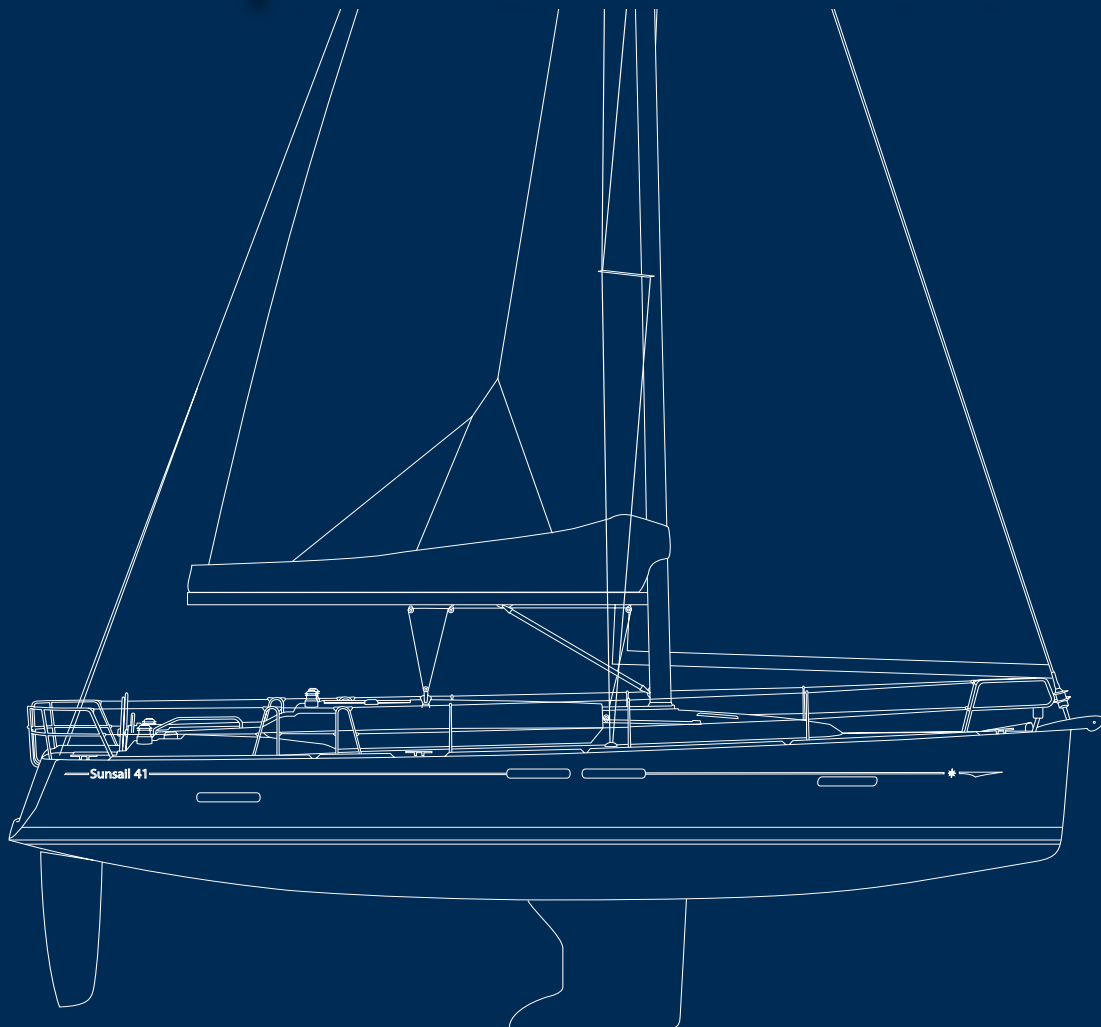

Specification and Equipment

HULL & DECK
Prisma Process® injected deck, ISO gelcoat surface, discontinuous balsa block coring
Solid, hand-laid fibreglass hull with ISO gelcoat surface, protective barrier coat
3rd generation inner fibreglass grid, high-load zones cut out and relaminated, drainage system through structure, special emergency repair zone in keel area
Open stainless steel bow pulpit
Stainless steel stern pulpits with flag holder and buoy bracket
Outboard engine bracket mounted on stern pulpit
Double stainless steel lifelines without PVC coating, stainless steel stanchions
Toerail with integrated stainless fairleads and drainage for side deck
4 x Mooring cleats forward and aft
2 x Cleats placed on side deck
Sculpted, long handrails on coachroof for secure movement
8 x Fixed hull ports with track-mounted curtains and shades
2 x Opening cockpit and hull ports
6 x Lateral fixed windows with curtains
2 x Opening ports integrated into lateral windows
6 x Opening deck hatches
Sunsail striping and graphics

ENGINE & STEERING SYSTEM

Yanmar 40 hp engine
Fully soundproofed engine compartment with engine access behind stairwell and from aft cabin
Fixed 3-blade propeller
Built-in muffler, forced air ventilation and stainless steel exhaust fitting aft
Fibreglass rudder
53 gal. / 200 l rotomolded fuel tank located under aft berth with deck fill
Emergency tiller delivered with the boat, chrome fitting in cockpit floor
Fuel filter with water separator
Fire resistant engine room fuel hose
Engine seawater filter

MOORING & ANCHORING

Primary and secondary anchor
Anchor roller
1000 w electric windlass with hand held remote wired direct
Anchor locker with room for anchor and tackle, integrated windlass area, holder for windlass handle

COCKPIT

Twin steering wheels with compasses at each steering position and stainless steel grabrails
Dedicated space for instruments within easy reach of helm positions, room for GPS chartplotter mounted at aft end of cockpit table with easy viewing from each helm
Throttle and engine control panel mounted at starboard helm, engine panel includes fuel gauge, RPM gauge, warning lights, ignition
Cockpit bench seating
2 x Cockpit lockers under bench seats and 1 lazarette locker under the port helm seat for technical access to steering system

GRP folding cockpit table with storage, cup holders, stainless steel handrail, courtesy lighting
12 v cigarette lighter socket
Gas locker located in lazarette locker under starboard helm seat, room for 2 gas bottles with connection to gas system and cut-off valve under stove in the galley
Retractable hot and cold water shower with tap
Liferaft locker located in dedicated compartment between helm seats
Storage compartment for companionway door in forward section of liferaft locker
Swim platform with swim ladder
Sprayhood and Bimini

MAST & RIGGING

Classic aluminium mast with double spreaders
Standing rigging -- discontinuous 1 x 19 stainless steel wire
Fixed backstay
Genoa furler with double slot, attachment to stemhead fitting and furling line lead aft to port helm winch
Topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets
Rigid boom vang & tackle
Windex
2 x reef lines (single line reefing)

SAILS & DECK HARDWARE

Upgraded, heavy duty fully battened mainsail
Upgraded, heavy duty furling genoa with UV protection strips
Heavy duty lazyjacks and stackpack system
2 x Self-tailing genoa winches
2 x Self-tailing coachroof winches
Genoa tracks with adjustable cars located on coachroof
2 x Winch handles with ball-bearing grip
Mainsheet and genoa sheet lead back to helm station with jammers
Line jammers on both sides of coachroof with return blocks
Roof-mounted mainsheet traveller with ball-bearing cars, control lines lead aft to cockpit

ELECTRICAL SYSTEM

80 amp 12 v alternator
Charge distributor/isolator
1 x 110 amp start battery
3 x 110 amp domestic batteries
40 amp battery charger
Positive battery switch for engine and domestic bank and general cut-off switch mounted on panel in aft cabin
Shorepower inlet with differential breaker, one plug per cabin, plug in galley, saloon and navigation station
Shore power cord wired direct (no transom plug)
Electrical panel with 12 v breakers, 12 v ammeter, 12 v consumption meter, 12 v charging meter
12 v plug per cabin and at navigation station
Floor level “courtesy” down lighting in Saloon
Flush mounted chrome brass ceiling lights in saloon, head compartments and cabins
LED reading lights in forward and aft cabins
Indirect halogen lighting under side decks in saloon and head compartments
Gooseneck chart light mounted at navigation station

Sunsail 41 - 3 Cabin, 2 Head

Propane solenoid valve
Electronic depth and speed reading speed over ground from the GPS
Electronic wind speed and direction
Autopilot
Chart plotter mounted in cockpit
VHF
Waterproof speaker for VHF in cockpit
Stereo/CD with front socket for MP3 with inside speakers
Waterproof cockpit speakers for stereo
Fans in each cabin plus saloon and galley
LED navigation lights and anchor light

WATER SYSTEM

2 x Rotomolded water tanks located under forward and aft berths with separate deck fills. Total capacity 140 gal. / 530 l
21 gal. /80 l rotomolded holding tank located in each head compartment with valve for overboard discharge via gravity and deck fitting for pump out
1 x additional 21gal. / 80 l waste tank
Hot and cold pressurised water distributed through-out the boat via semi-rigid hose
“Heavy-duty” water pump and accumulator tank for consistent water pressure
10 gal. / 40 l hot water tank that is connected to engine heat exchanger and to 110 v or 220 v electrical system
Electric bilge pump on float switch and manual dual-action pump in the cockpit
Digital water level display
Shower sumps equipped with individual electric pumps with filters and on-off switches
Large manual pump marine toilets

INTERIOR

Contemporary interior design in “Fine Teak” laminated panels with solid wood trim around galley, companionway and cabinetry, finished in satin UV stabilised varnish
Laminate floorboards with light-coloured lines, varnished edges

SALOON

Headroom: 6 ft 3 in / 1.92 m
Saloon with U-shaped seating area to starboard, wrap-around cushions and storage under seating area
Saloon dining table
Saloon table converts to a double berth
Saloon cushions
Storage cabinets along hull sides
Lounge seating to port with plush cushions and upper storage cabinets
Saloon stereo speaker

GALLEY

Headroom 6 ft 3 in / 1.91 m
Galley with double stainless steel sinks with covers, and reversible cutting board, solid counter tops, chrome plumbing fittings, storage cabinets and drawers
L-galley to starboard with glass separator between galley counter and seating area
Storage compartment for books and magazines
Stainless steel gimbaled stove with 2-burners, oven and grill. Stainless steel protection bar
47 gal. / 180 l Fridge compartment with vertical access
Single fridge box with freezer area, wire baskets, 12 v refrigeration and integrated compressor

NAVIGATION STATION
Full-function navigation station with general electrical panel, room for GPS chartplotter and bookshelf
12 v cigarette lighter socket at chart table
HEADS
2 head compartments
Chrome shower taps in heads
Forward head compartment with: Sink
Clothes hook, mirror, towel holder, toilet paper holder, wastebasket
Cabinet above sink
Large, manual toilet
Electric drainage pump
Large aft head compartment with: Sink
Clothes hook, mirror, towel holder, toilet paper holder, wastebasket
Cabinet above sink
Large, manual toilet
Electric drainage pump
Access from saloon

COMPANION WAY

Headroom: 6 ft 4 in / 1.94 m
Companionway with non-slip steps
Plexiglass companionway door with dedicated storage location

FORWARD CABIN

Forward cabin with central berth and storage forward of the berth
Headroom: 6 ft / 1.84 m
6 ft 10 in / 2.1m x 6 ft / 2m double berth, with wood trim, high-density foam marine mattress
Deep cabinet with shelves and hanging rod
White vinyl lining on hull with lateral wood shelf

TWIN AFT CABINS

Headroom: 6 ft 4 in / 1.95 m
6 ft 6 in / 2.00 m x 5 ft 1 in / 1.57 m double berths with high-density foam marine mattress
Deep cabinet with shelves and hanging rod per cabin
White vinyl lining on hull with lateral wood shelf

ADDITIONAL CRUISING GEAR

Above-deck equipment
Bedding, linens and galley equipment
Mosquito screens
Safety equipment



The SunSail 41

NEW for 2010/2011 the SunSail 41 has taken on key design innovations which include the complete rethinking of the deck and sail plans to make this boat, not only fast, but incredibly easy to handle.

Twin wheels and a large swim platform make spending time aboard the SunSail 41 relaxing and comfortable. Flush hatches and clean decks give the boat a sophisticated look while ensuring safe movements while on board. Special curved hatches and windows give the boat a sleek look while enhancing visibility and ventilation below.

Down below, the attention to detail can be felt throughout with its contemporary interior design, and a mass of light pouring in through numerous hull ports and overhead hatches.

Technical Information

Length Overall	40 ft 5 in. / 12.34 m
Waterline Length	36 ft 1 in. / 11.00 m
Beam	13 ft 1 in. / 3.99 m
Draft	6 ft 10 in. / 2.10 m
Sail Area	848 sq ft / 78.9 sq m
Engine	40 hp
Fuel Capacity	53 gal. / 200 l
Water Capacity	140 gal. / 530 l
Berths	6 + 2 in saloon
Displacement	16,424 lbs / 7,450 kg
Heads	2
Showers	3

