

DT-6.25


6000
SERIES

Specification


Tweeter Type	Dome 1" - 25 mm
Nominal Impedance	4 Ohms
Nominal Power RMS	100 W
Continuos Peak Power	160 W
Frequency Response	1.3 - 20 KHz
Sensitivity 1W/1m	90 dB

Thiele-Small Parameters

Moving Coil Resistance	Re	3.4 Ohms
Resonance Frequency	Fs	1360 Hz
Mechanical Q	QMS	1.21
Electric Q	QES	1.58
Total Q	QTS	0.68
Emission Diameter	D	2.58 cm
Surface Area	Sd	5.22 cm ²
Moving Coil Inductance	Le	0.04 mH

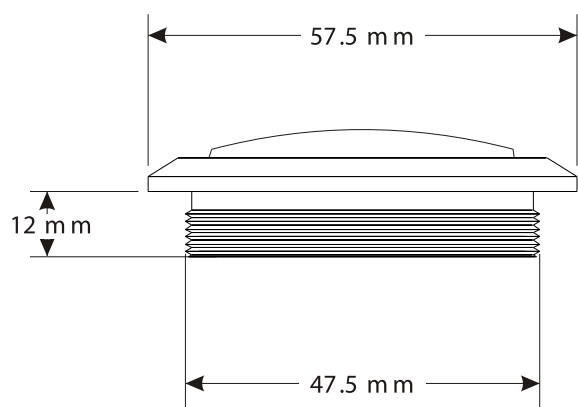

Frequency response 1W/1m

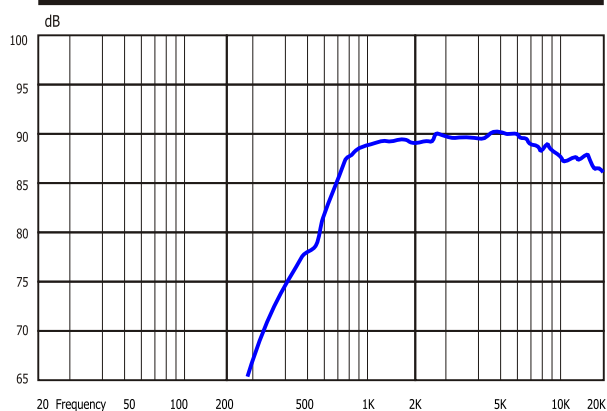

Impedance Curve (Free-air)

