

SUNNY FLOWATCH® DUO allows to evacuate condensates from air conditioning units up to 10 kW (36 000 BTU) and from refrigerating appliances.



Adapter supplied



20.2 dBA


Very compact

SUNNY FLOWATCH® DUO evacuates in silence condensates from gas condensing boilers up to 60 kW (200 000 BTU).

SPECIFICATIONS

Max flowrate	19 l/h
Max discharge head	10 m
Electrical power	19 W
Voltage	220-240 V 50/60 Hz
Alarm	NO/NC 5A
Thermal protection	100°C
Operating cycle	100 %
Dimensions	180 x 110 x 110 mm

FLOWRATE

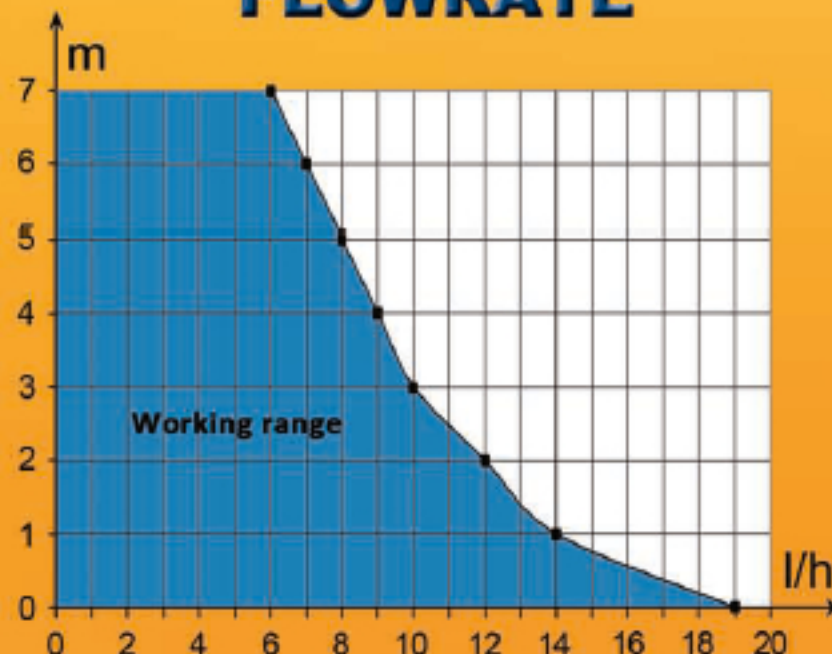

BENEFITS

