




Blade Laws (revised 02/14)

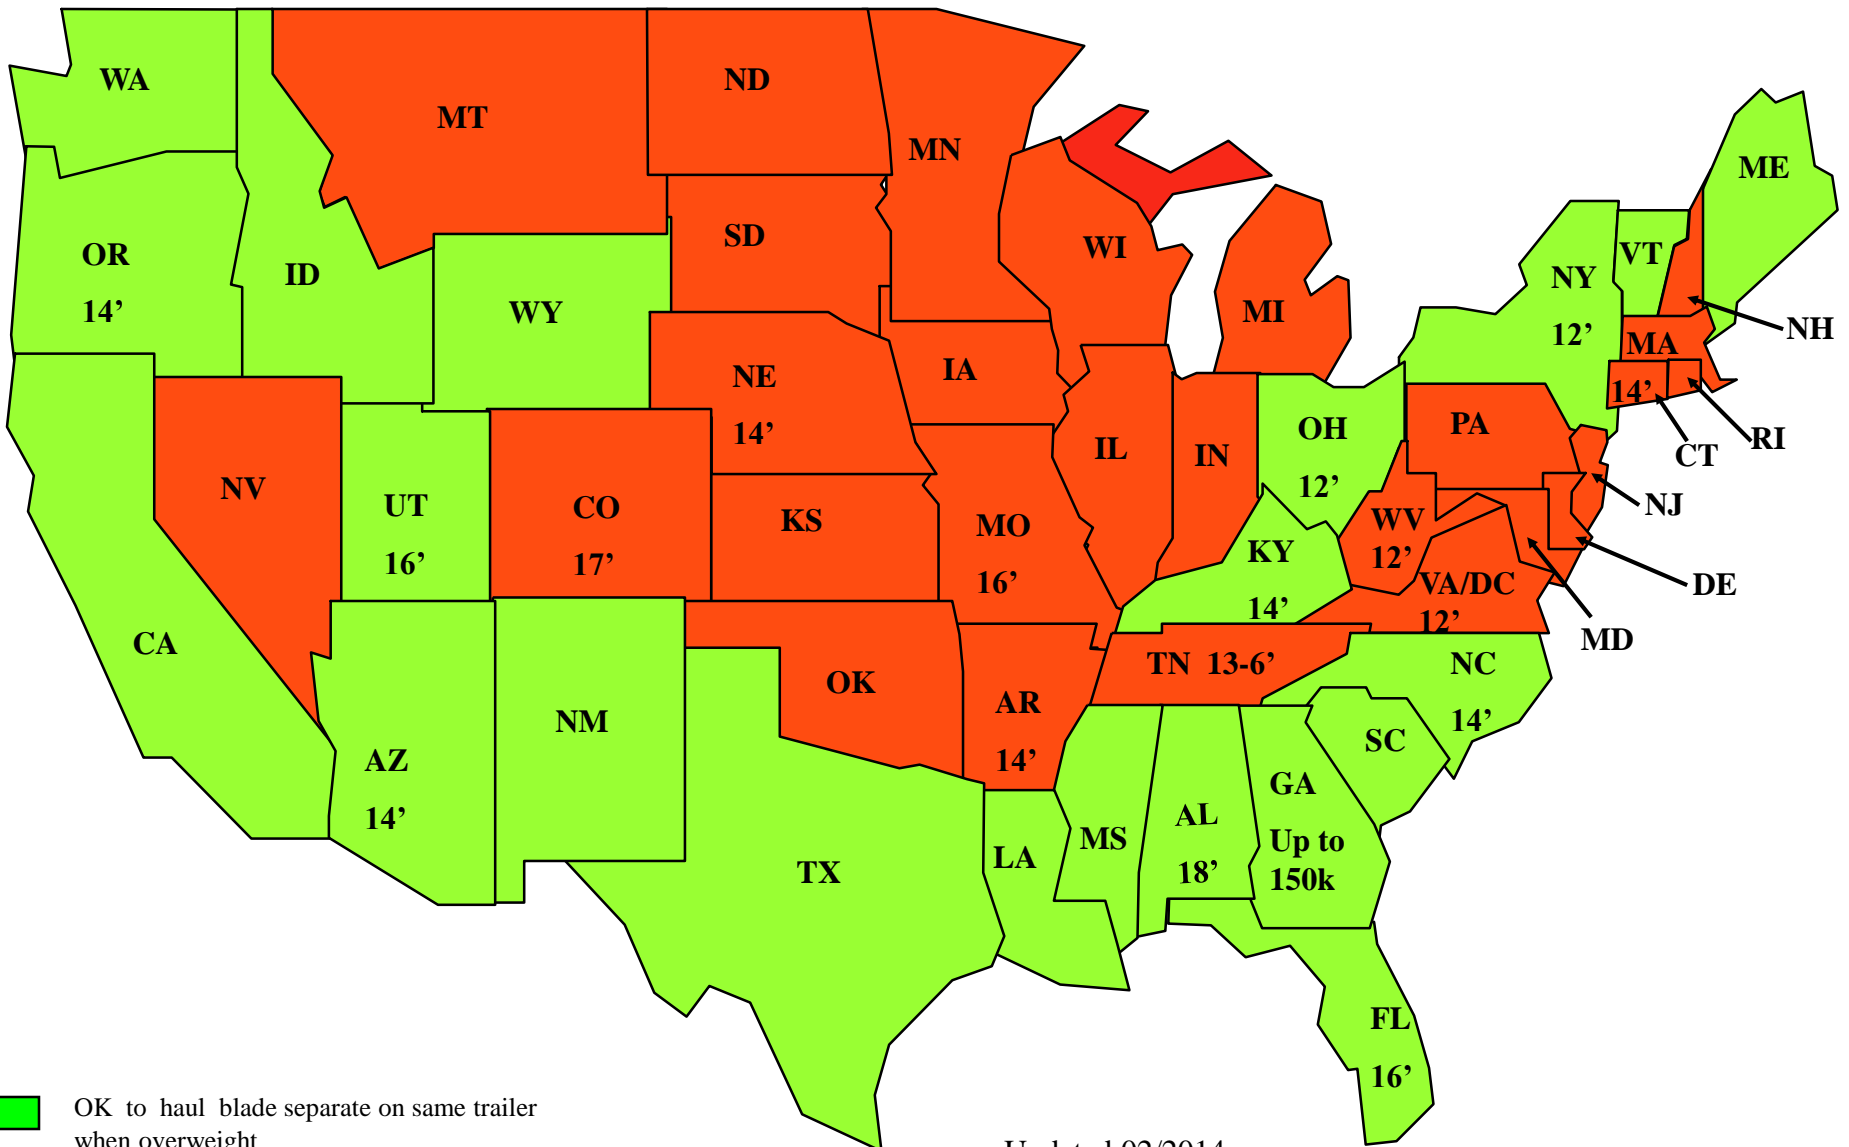

 OK to haul blade separate on same trailer when overweight

 Not allowed to haul blade separate on same trailer when overweight

NOTE: Dims are max. width of blade if left attached.

Updated 02/2014

GA: No Max width. Can carry if up to 150,000 gross, but must be permitted as **Dozier Width Blade**

KY: Blades, buckets, etc., over 14' wide, must be removed but can be hauled with the load

MO: Max 16'W Cannot haul Loose if overweight.

AL: When a blade protrudes beyond the transporting vehicle, bulldozers, front-end loaders and similar equipment shall be loaded with the rear of the machine facing the front. Buckets, booms, counter-weights must be removed and transported on a separate vehicle.

AZ: All bulldozer blades and dozer arms which are more than 14' (measured at right angles to the longitudinal axis of the hauling equipment) shall be removed and transported in a manner so that they will not create a traffic hazard. Equipment having dozer blades shorter than 14' wide may transport without detaching the blade from the tractor provided the dozer is firmly supported.