


## Minor Totally Enclosed Premier Liftbags.



The Minor Totally Enclosed liftbags range from 50Kg (T1C) to 500Kg (T10C) lift capacity, with a safe working load of 6:1. Each bag has heavy duty webbing straps, anchor points, shackles, inlet/outlet valve and over pressure relief valve.  
All liftbags are supplied ready for use with test certificates and logbook.

### Technical Specifications

Model	Lift Capacity	Overall Length	Overall Dia	Overall Height	Shackle Pick Up Points	¾ Inch Inlet Assembly	Approx. Folded Dimensions m./dia x m./l	Net Weight
T1C	50 Kg	0.65 M	0.30 M	0.42 M	2	1	0.20 x 0.60	5.0 Kg
T2C	100 Kg	0.93 M	0.43 M	0.55 M	2	1	0.25 x 0.65	6.0 Kg
T5C	250 Kg	1.15 M	0.68 M	0.81 M	2	2	0.30 x 0.68	12.0 Kg
T10C	500 Kg	1.38 M	0.85 M	0.98 M	2	2	0.30 x 0.78	13.5 Kg

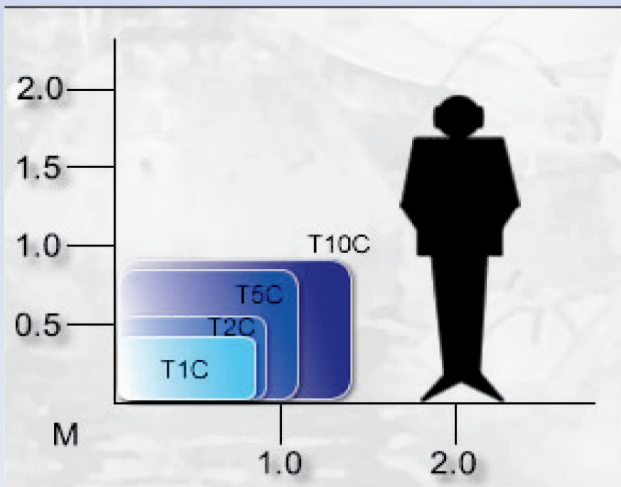

### Advantages

Optional lifting beam.  
Fabricated from high tenacity polyester cloth coated with P.V.C.  
Durable, versatile and easy to use.  
Folded compactly for easy efficient storage.  
Radio Frequency (RF) welded seams for strength and integrity.  
Safe working load ratio of 6:1.  
Complete with test certifications and logs, these products are ready for use when leaving our manufacturing facility..  
Suitable for long term use.  
Suitable for shallow water usage.

### Applications

- Pontoons.
- Military equipment.
- Bridge supports.
- Extra buoyancy for pipe and cable float-out operations.



All of JW Automarine's products are manufactured in accordance with **ISO 9001:2008** and exceed **IMCA D016 REV 3:2007** requirements of 5:1 SWL  
**Quality Certifications**  
ISO 9001:2008 Certificate Number GB09/77978